SENCO®

Fastening Solutions™

PW 150R

16 Ga. Wide-Crown Roofing Stapler

Heavy Duty wide crown staplers capable of handling a variety of applications. The Wide-crown staplers are lightweight and well-balanced, minimizing operator fatigue.

PRO SERIES 1 YEAR

INCLUDES CASE

Tool Specifications:

Item #: 2Z0001N: Contact Actuation (Dual Action)
2Z0002N: Sequential Actuation (Restrictive)
Weight: 5.2 lbs. (2.36 kg)
Height: 8 3/4" (222.25 mm)
Length: 14 3/8" (365.125 mm)
Staple Capacity: 150
Operating Pressure: 70-120 psig (4.8-8.3 bar)
Mode of Operation: Tool is available with either contact actuation or sequential trigger mechanism.
Hose Fitting: 1/4" NPT

Fastener Specifications:

Staples: Drives 3/4"- 1 1/2" , 16 ga 1" wide crown staples

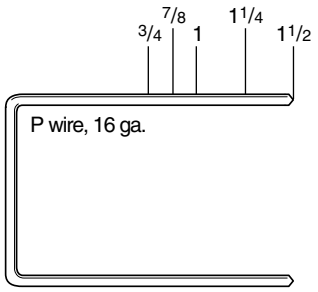

Applications:

Primarily for asphalt roof shingles. Also capable of handling a variety of other applications including foam insulation board, corrugated carton to skid, furniture/cabinet frames and butt-joints.

Features and Benefits:

- *Lightweight 5.2 pounds*
- *High load capacity (150 staples)*
- *Designed for fast loading, consistent flush driving*
- *Adjustable depth of drive safety*
- *Comes in a rugged tool case*
- *EZ Clear virtually eliminates downtime caused by fastener jams*
- *Long lasting wear plates and carbide safety*
- *Drives 3/4"- 1 1/2" , 16 ga 1" wide crown staples*
- *One year warranty*

©2005 by Senco Products, Inc.

SENCO®

Fastening Solutions™

PW 150R

16 Ga. Wide-Crown Roofing Stapler

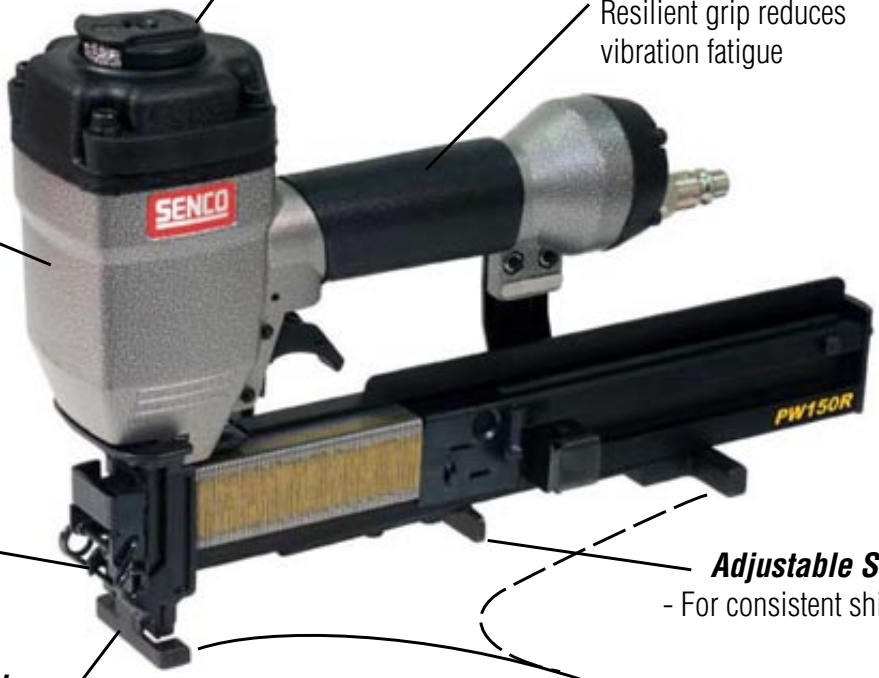

360º
Adjustable Exhaust

Comfort Grip
Resilient grip reduces vibration fatigue

Powerful and Fast
Weighs just 5.2 lbs.

EZ-Clear Latch
Provides quick and easy clearing of fasteners

Adjustable Shingle Guide
- For consistent shingle placement

Adjustable Depth-of-Drive Safety
Drives staples to a consistent and controllable depth

Steel Wear Plates
Reduces shingle abrasion on tool

For additional information on how SENCO Power Fastening Systems will save you time, reduce costs, and increase quality, call our toll-free Action Line: 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor . Visit our web site at: www.senco.com

SENCO's Trigger Systems

Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates by following a sequence - depress the safety element on the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates by keeping the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element on the nose of the tool against the work surface where the fastener is to be driven. The trigger can be pulled either before or after depressing the safety element. This trigger is recommended for use by trained professionals only in high production or volume applications.

Both trigger systems are available, FREE OF CHARGE, for most SENCO tools. Choose the right trigger system for your specific needs!

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. Also, log on to www.senco.com or call 1-800-543-4596 for more information on SENCO's trigger systems.

©2005 by Senco Products, Inc.